


Data Center Ready Racks

Save Money And Time With Pre-Configured Rack Solutions

Ready-to-Install Rack and Power Bundles.

Protect your IT equipment with Data Center Ready Racks from Emerson Network Power, featuring the innovative Knurr rack integrated with reliable Liebert power protection and monitoring products:

- Fully configured solution
- Single SKU ordering
- 9 rack and power options
- Ready to install

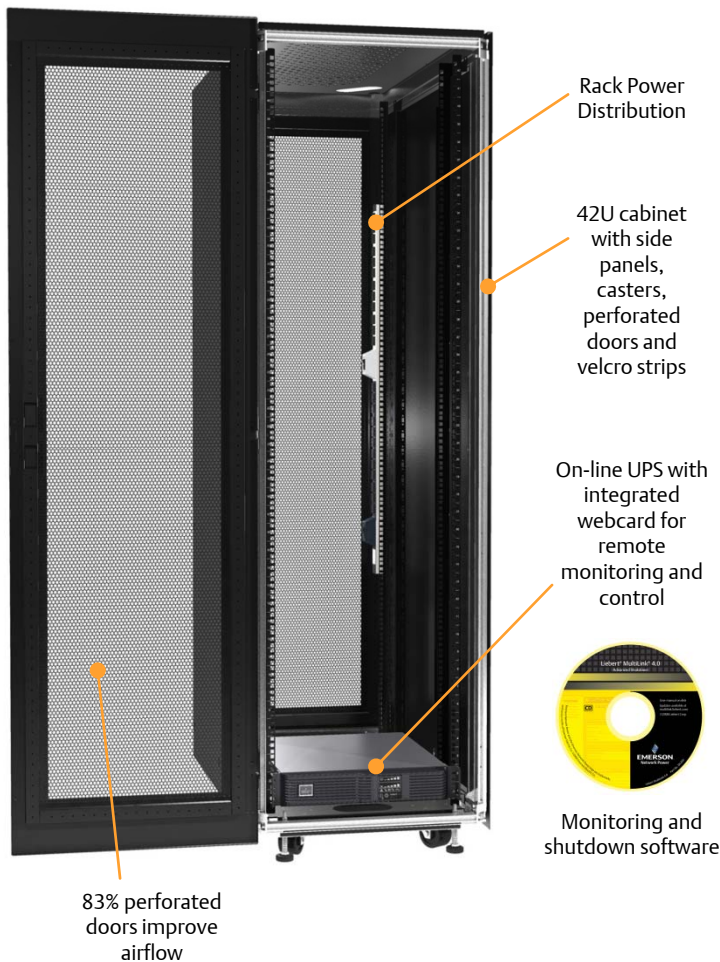

Bundled Solutions Feature:

Flexibility:

- Easy to select with a single part number.
- Single cabinet and two cabinet configurations available.

Higher Availability:

- Factory-tested equipment is system-matched to ensure compatibility.
- On-line UPS, rack power distribution, and system monitoring and shutdown software enhance availability of the protected equipment.
- 4200W/6kVA and 8000W/10kVA UPS systems include Maintenance Bypass, allowing protected equipment to remain on during UPS maintenance.

Lowest Total Cost of Ownership:

- Assembled, matched equipment provides the economies of a bundled solution.
- All support equipment includes factory warranty and a technical support hotline.



Perfect for IT applications requiring fast deployment and high availability.

Data Center Ready Rack Configurations

Components	Specifications								
Part Description	1 Rack ; 1800W, 120V Power	1 Rack; 2700W, 120V Power	1 Rack; 2700W, 208V Power	1 Rack; 4200W, 120V Power	1 Rack; 4200W, 208V Power	1 Rack; 8000W; 208V Power	2 Racks; 4200W, 120V Power	2 Racks; 4200W, 208V Power	2 Racks; 8000W; 208V Power
Liebert Model Number	010200065	010200066	010200067	010200068	010200069	010200090	010200070	010200071	010200072
Knurr Miracel Rack Enclosure *	42U *	42U *	42U *	42U *	42U *	42U *	(2) 42U *	(2) 42U *	(2) 42U *
Available Rack U	39U	39U	39U	37U	37U	35U	79U	79U	77U
Liebert GXT UPS w/ rack mounting kit	2kVA/ 1800W 120V Input: NEMA 5- 20P; Output: (4)NEMA 5- 20R	3kVA/ 2700W 120V Input: NEMA L5- 30P; Output: (4)NEMA 5- 20R & (1) NEMA L5-30R	3kVA/ 2700W 208V Input: NEMA L6- 20P; Output: (2)NEMA L6- 15R & (1) NEMA L6-20R	6kVA/ 4200W 120/208V Input: NEMA L14- 30P; Output: (4) NEMA L5- 20R & (2) NEMA L5- 30R. Includes Maintenance Bypass. Battery: Internal Battery Kits	6kVA/ 4200W 120/208V Input: NEMA L14-30P; Output: (4) NEMA L5- 15/20R & (2) NEMA L6- 30R. Includes Maintenance Bypass. Battery: Internal Battery Kits.	10kVA/ 8000W 120/208V input hardwired; Output (4) 5- 20R, T-type (4) L6-30R. Includes Maintenance Bypass. Battery: Internal Battery Kits	6kVA/ 4200W 120/208V Input: NEMA L14-30P; Output: (4) NEMA L5- 20R & (2) NEMA L5- 30R. Includes Maintenance Bypass. Battery: Internal Battery Kits	6kVA/ 4200W 120/208V input: NEMA L14-30P; Output: (4) NEMA L5- 15/20R & (2) NEMA L6- 30R. Includes Maintenance Bypass. Battery: Internal Battery Kits	10kVA/ 8000W 120/208V input hardwired; Output (4) 5- 20R, T-type (4) L6-30R. Includes Maintenance Bypass. Battery: Internal Battery Kits
Knurr DI-STRIP Basic Rack PDU	120V Input: NEMA 5- 20P; Output: (12) NEMA 5-20 T-Slot	120V Input: NEMA L5- 30P; Output: (24) NEMA 5-20 T-Slot	208V Input: NEMA L6- 20P; Output: (12) IEC C13	(2) 120V Input: NEMA L5-30P; Output: (24) NEMA 5- 20 T-Slot	208V Input: NEMA L6- 30P; Output: (20) IEC C13 (4) IEC C19	(2) 208V Input: NEMA L6-30P; Output: (20) IEC C13 (4) IEC C19	(2) 120V Input: NEMA L5-30P; Output: (24) NEMA 5- 20 T-Slot	(2) 208V Input: NEMA L6-30P; Output: (20) IEC C13 (4) IEC C19	(2) 208V Input: NEMA L6-30P; Output: (20) IEC C13 (4) IEC C19
Liebert IntelliSlot UPS WebCard	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Liebert MultiLink UPS Shutdown Software	5 Client	10 Client	10 Client	20 Client	20 Client	20 Client	20 Client	20 Client	20 Client

* Knurr Miracel Rack Enclosure includes side panels, perforated doors, perforated roof, low profile casters, and Velcro cable management strips. Cabinet dimensions: 23"W x 78"H x 44"D

Liebert Corporation

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.
© 2009 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.
All names referred to are trademarks or registered trademarks of their respective owners.
® Liebert and the Liebert logo are registered trademarks of the Liebert Corporation.

VR-01436 Rev. 1 (03/10) Printed in USA

