

Liebert® ACV Series

The Industry Standard For Surge Protection

The Liebert ACV Series, (AccuVar) is a multi-phase, multi-mode distribution panel mounted surge protective device that offers continuous protection from damaging transients and electrical line noise.



Features & Benefits

- Easy, safe, and maintenance-free operation.
- Repeatability surge current capability for long life.
- Easily retrofits on existing panelboards.
- Compact Module attaches directly to breaker panel.
Dimensions:
7"L x 4.25"W x 4"D
Weight: 6 lb. 6 oz.
- Patented Liebert AccuVar Detection Circuitry monitors all modes of failure, including neutral to ground.
- Standard Audible Alarm to indicate reduced protection.
- ANSI/IEEE C62.41 Category A, B, & C3 Compatible ANSI/IEEE C62.11, C62.45 Tested.
- UL Tested for outdoor use suitability.
- High-isolation dry contacts for remote system integrity monitoring.
- ANSI/UL 1449 Third Edition Listed.
- 10-Year Warranty.


General Specifications

Connection Means:	Parallel connected
Certifications:	ANSI/UL 1449 Third Edition, UL 1283 (Type 2 locations), CSA and CE listed
Protection Modes:	All modes standard (L-N, L-G, N-G, L-L) optional—any combination
Surge Current Rating:	ACV 65 KA/Mode, 130 KA/Phase All 80 KA/Mode, 160 KA/Phase
50 ohm EMI/RFI Attenuation:	63 dB max from 10kHz to 100MHz
Response Time:	< 0.5 nanoseconds
Operating Frequency:	47/63 Hz
Enclosure:	Grey Noryl HS-1000, Rated 94-5V, NEMA, 12, 4, 4X
Fault Current Rating:	200,000 AIC
Location Type:	Type 1
Nominal Discharge Current (In):	20kA
Line Frequency:	47-63 Hz
Line Voltage:	+/-15% nominal
Temperature:	-40 to +60 degrees C
Relative Humidity:	0 to 95% noncondensing
Altitude:	0 to 18,000 feet
Audible Noise:	Less than 45 dBA
Standard Monitoring:	LEDs and Audible Alarm



Maximum Safety:

The modules used in the Liebert AccuVar System are UL tested at 600 VAC and 200,000 AIC. Each MOV inside the module is individually fused and matched to within 1 Volt to ensure maximum sharing and full surge current handling capability. These 99.9% pure silver links are ultrafast clearing providing minimal follow current in the event failure occurs.

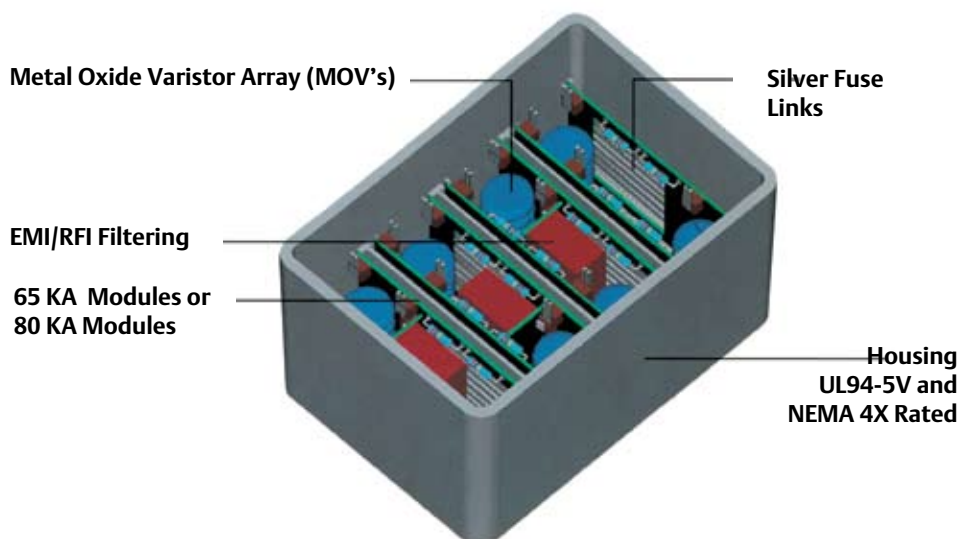

While every precaution has been taken to ensure accuracy and completeness in this literature, Liebert Corporation assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

© 2010 Liebert Corporation. All rights reserved throughout the world. Specifications subject to change without notice.

All names referred to are trademarks or registered trademarks of their respective owners.

© Liebert is a registered trademark of the Liebert Corporation.

SL-22040 (R01/10) Printed in USA

Emerson Network Power.

The global leader in enabling Business-Critical Continuity™.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- Embedded Power
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

Business-Critical Continuity™, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2010 Emerson Electric Co.