## WS Series Wall Mount/Swing Out Enclosures

WS Series of Wall Mount/Swing Out Enclosures provide 19" EIA 310-D compliant mounting in a heavy-duty distribution enclosure. This durable enclosure features a center swing out section for outstanding front and rear access to cables and equipment. A simple finger pull/latch mechanism located inside the enclosure opens the 18.375" deep center swing section.

Remote installation of equipment before wiring is possible with a set of optional casters. Optional casters also increase the weight capacity and stability of the enclosure.

Note: Standard unit is configured with a solid door and side panels. Total width and depth including hinges are 24.875"W and 24.688"D. Casters add 3.625" to the total height. Two pairs of 12-24 tapped 19" EIA rails are provided with each enclosure.



Listed to UL60950-1



The weight capacity will depend on the size of the enclosure, method of mounting and type of wall construction if wall mounted.

STOCK COLOR: Black

#### WS SERIES WALL MOUNT/SWING OUT Enclosures

PART NO.	DESCRIPTION
GL24WS-SS	Solid Front Door & Solid Sides Dimensions: 24"H x 24"W x 24"D Wt. cap.: 250 lbs.* Rack spaces: 11 RMU Shipping weight: 125 lbs.
GL24WS-SV	Same as GL24WS-SS except with Solid Front Door & Vented Sides
GL24WS-PS	Same as GL24WS-SS except with Plexi Front Door & Solid Sides
GL24WS-PV	Same as GL24WS-SS except with Plexi Front Door & Vented Sides
GL36WS-SS	Solid Front Door & Solid Sides Dimensions: 36"H x 24"W x 24"D
GL36WS-SV	Wt. cap.: 300 lbs.* Rack spaces: 18 RMU Shipping weight: 150 lbs.
GL36WS-SV GL36WS-PS	Same as GL36WS-SS except with Solid Front Door & Vented Sides
	Same as GL36WS-SS except with Plexi Front Door & Solid Sides
GL36WS-PV	Same as GL36WS-SS except with Plexi Front Door & Vented Sides
GL48WS-SS	Solid Front Door & Solid Sides Dimensions: 48"H x 24"W x 24"D Wt. cap.: 350 lbs.* Rack spaces: 25 RMU Shipping weight: 200 lbs.
GL48WS-SV	Same as GL48WS-SS except with Solid Front Door & Vented Sides
GL48WS-PS	Same as GL48WS-SS except with Plexi Front Door & Solid Sides
GL48WS-PV	Same as GL48WS-SS except with Plexi Front Door & Vented Sides
GL72WS-SS	Solid Front Door & Solid Sides Dimensions: 72"H x 24"W x 24"D Wt. cap.: 450 lbs.* Rack spaces: 38 RMU Shipping weight: 275 lbs.
GL72WS-SV	Same as GL72WS-SS except with Solid Front Door & Vented Sides
GL72WS-PS	Same as GL72WS-SS except with Plexi Front Door & Solid Sides
GL72WS-PV	Same as GL72WS-SS except with Plexi Front Door & Vented Sides


\*Maximum weight capacities at minimal deflection.

Weight capacities are listed for Wall Mounting only. Up to 850 lbs. weight capacity is possible using a combination of wall mounting and casters.

Industry Exclusive - Wall or Floor Mount Extra Heavy Duty Wall Mount Enclosure!

# **WS Series Wall Mount/Swing Out Enclosures**

#### WS SERIES WALL MOUNT/SWING OUT Enclosures

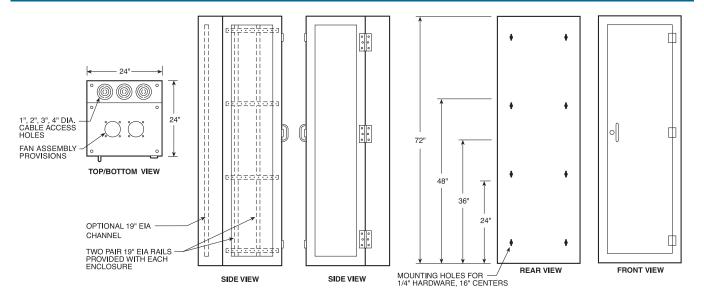


- Finger pull/latch for opening and closing center swing section
- · Heavy-duty distribution enclosure
- Reversible cabinet mounting design for left or right-hand swing out
- · Reversible door
- · Front and rear access to cables and equipment
- Knockouts sized for 1", 2", 3" and 4" conduit and fittings located at top, bottom and rear

### WS Series Accessories



Fan Assembly w/Fan Guard 7217WS



WS-22 66/110 Block Mounting Panel (shown with two 110 blocks)



Wall Mount Products

7219-SR14 Front

14 Position Power Strip

### **ACCESSORIES**

#### PART NO. DESCRIPTION

	7206-FM	Stationary front mount shelf – 17.25"W x 18.00"D
	7206-EIA	Stationary shelf – 17.468"W x 18.00"D
	7206-SL	Sliding shelf – 16.343"W x 17.50"D
	7219	6 position power strip with circuit breaker & 15 ft. cord
		for 19" mounting
New	7219-SR14	Rack mount 14 position (6 front/8 back) power strip
		with circuit breaker and surge suppressor
	7217WS	Fan assembly with fan guards and two 75 CFM fans
	WS-22	66/110 block mounting panel
	7208WS	Casters – (3) locking and (3) non-locking (3.625"H)
	7208WS-ALL	Casters – (6) locking (3.625"H)
	CBB-19	Copper bus bar, 19" rack mounted (isolated)
New	FFK1	Four fan filters (works with the WM, WS and WD
~		Series of Wall Mount Products)